


SCAMBIATORI A PIASTRE ISPEZIONABILI

Le nostre geometrie ottimali:
alta efficienza e ridotta perdita di carico per ogni esigenza di scambio termico

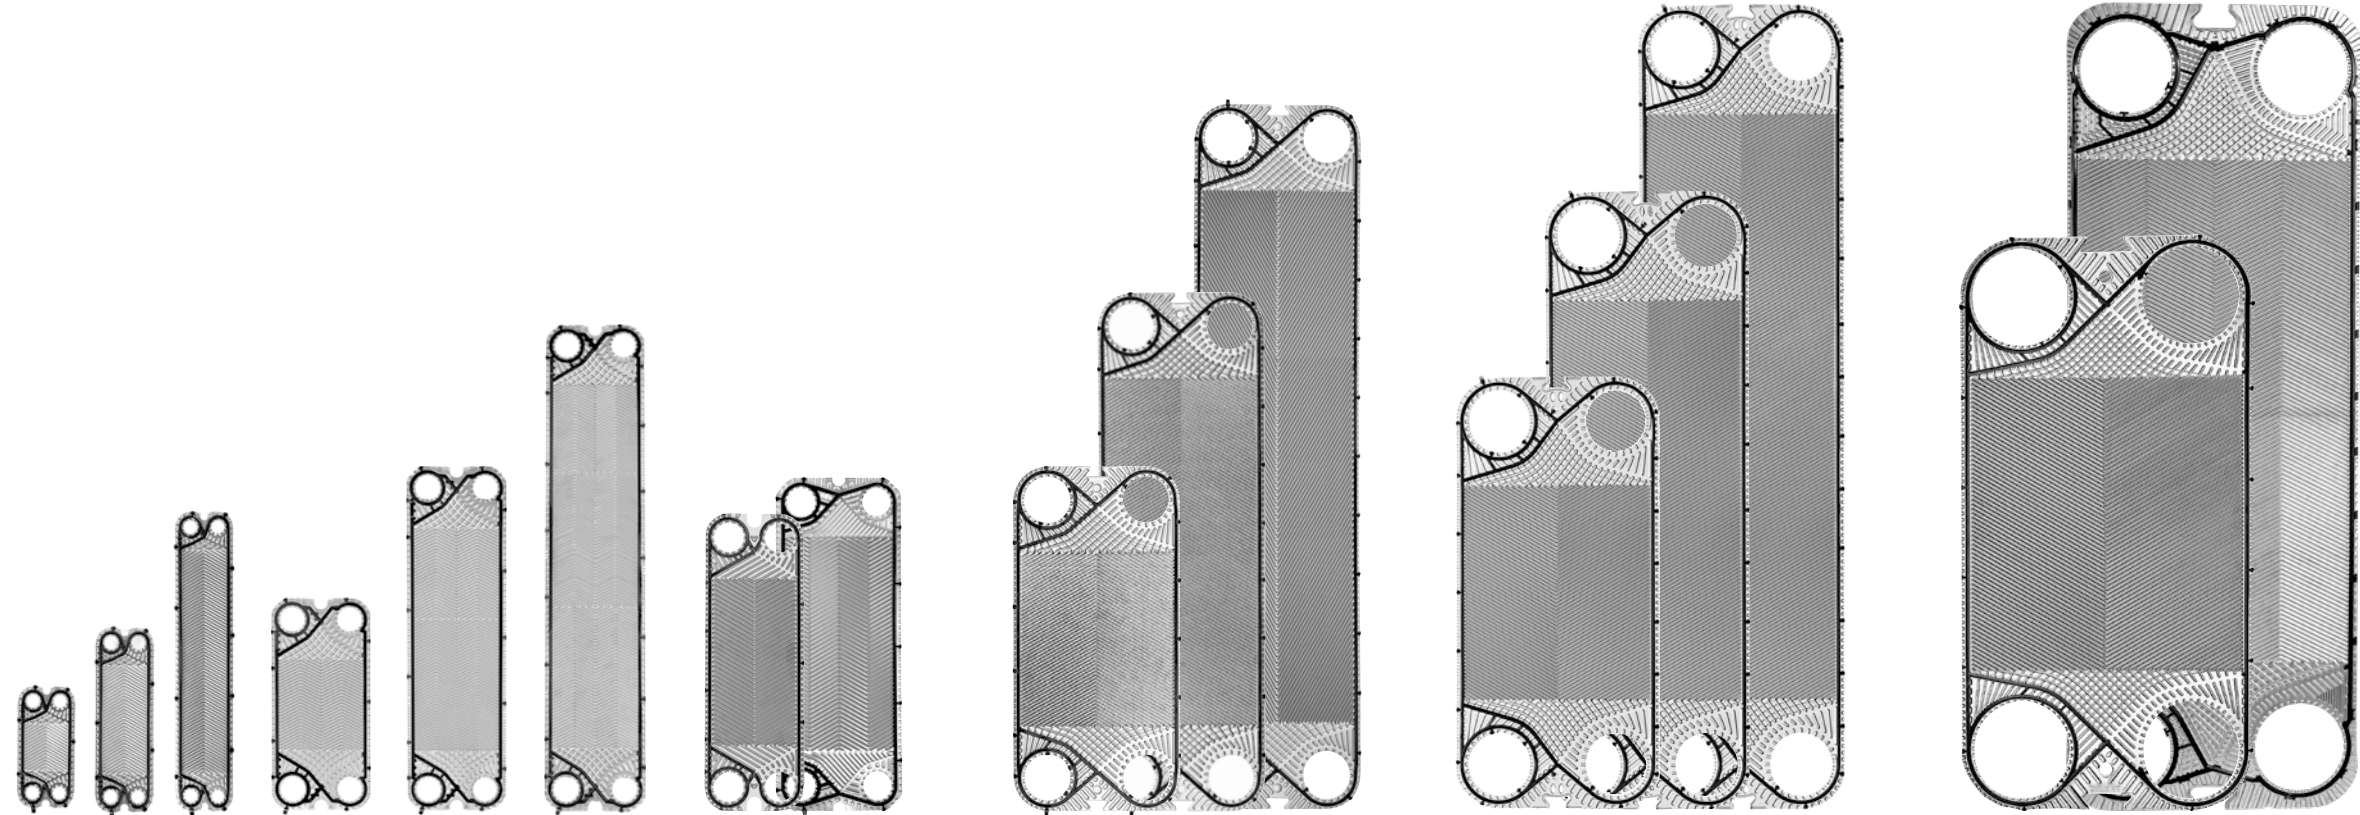

MODELLI <i>MODEL</i>		DN 32 [1 1/4"]			DN 50			DN 65 [2 1/2"]		DN 100 [4"]			DN 150 [6"]			DN 200 [8"]		
		S020+	S040+	S080+	S070+	S160+	S260+	S125+	S180+	S300+	S450+	S700+	S400+	S600+	S900+	S650+	S990+	
Portata max d'acqua <i>Water flow rate max.</i>	m³/h	19			63			80	83	240			380			800	730	
Area di scambio <i>Heat transfer surface max</i>	m²	1,6	3,1	8,2	11,8	41,2	63,8	19	27	108	193	280	215	355	631	334	534	
Angolo di corrugazione <i>Plate corrugation angle</i>		A			A/B			A/B		A/B			A/B			A/B	A/B	
Quota di serraggio <i>Tightening quote</i>	d	mm			mm			mm		mm			mm			mm	mm	
		2,9 x np + 2			2,9 x np + 2			3,3 x np + 2		2,85 x np + 2			3,1			3,3	3,1	
Altezza <i>Height</i>	H (min - max)	mm	320	470	755	678 - 720	1008 - 1050	1353 - 1395	819	996 - 1030	1124	1569	2014	1372	1819	2272 - 2317	1657 - 1707	2190 - 2206
Larghezza <i>Wide</i>	W (min - max)	mm	200			310			310	392	530			609			810	790

DETTAGLI COSTRUTTIVI

Il know-how aziendale risalta anche nella cura di ogni piccolo dettaglio funzionale.

Guida piastre con punti di contatto in acciaio inox




Carrying bar/stainless steel contact

Facile montaggio delle piastre e ingombri contenuti



Easy positioning of plates and optimized footprint

Assemblaggio e manutenzione agevolata

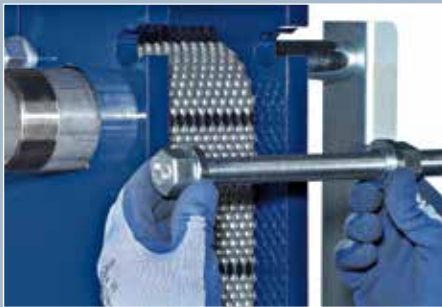

Easy assembly and disassembly

PRODUCT DETAILS

The company know-how also stands out taking care every single functional detail.

Coibentazioni termoacustiche



Insulation case

Coibentazioni termoformate per applicazioni in caldo e in freddo



Heating & Cooling insulation shell

Telai in acciaio inox



Stainless steel frame